




A HIGHER STANDARD OF **QUALITY**

TILT DECK UTILITY

/ T R A I L E R /



SOLD EXCLUSIVELY THROUGH AUTHORIZED DEALERS:




www.TitanTrailer.com

GOOSENECK TILT DECK

The **Gooseneck Tilt Deck Trailer** allows you to easily load and off-load heavy equipment and machinery. High end features come standard, like the Stationary Valve, which allows for multiple pieces of equipment to be loaded at once.

Give us a call today (866) 294-4514.

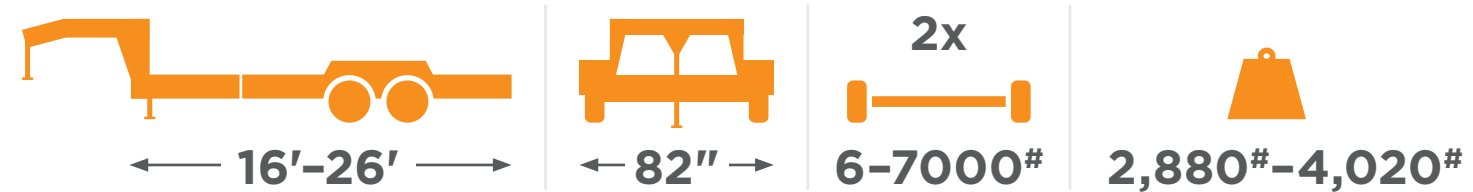

Treated 2 x 8 Wood Floor
Standard Feature



Tilt Latch
Standard Feature



Stationary Valve
Standard Feature



Black Wheels
Standard Feature




Stationary Floor
Available in 0' (full tilt), 4', or 6' lengths

Tilt Floor
Available in 16' and 20' lengths

BUMPER HITCH TILT DECK


The **Bumper Hitch Tilt Deck Trailer** is built to be used. Manufactured using double 6" Channel Main Frame, 3" Channel Crossmembers, 11 ga. Diamond Plate Fenders, and the 2' Dovetail Ramp. Bring on the loads.

Give us a call today (866) 294-4514.

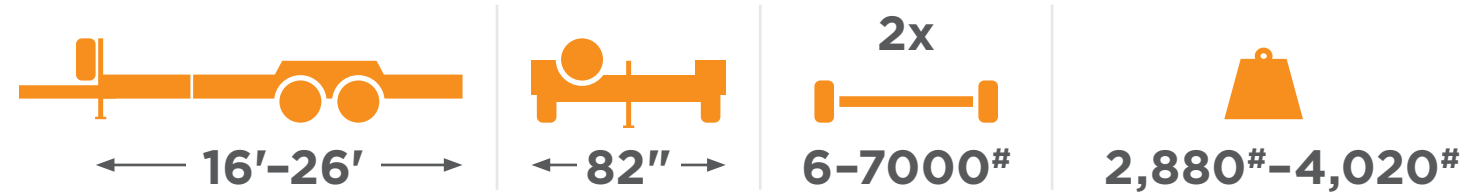

Adjustable Coupler
Standard Feature

Breakaway Battery Box with Charger and Tester
Standard Feature



11 Gauge Diamond Plated Fender
Standard Feature



2' Dovetail Ramp
Standard Feature




Stationary Floor
Available in 0' (full tilt), 4', or 6' lengths

Tilt Floor
Available in 16' and 20' lengths

TILT DECK UTILITY

COLOR OPTIONS

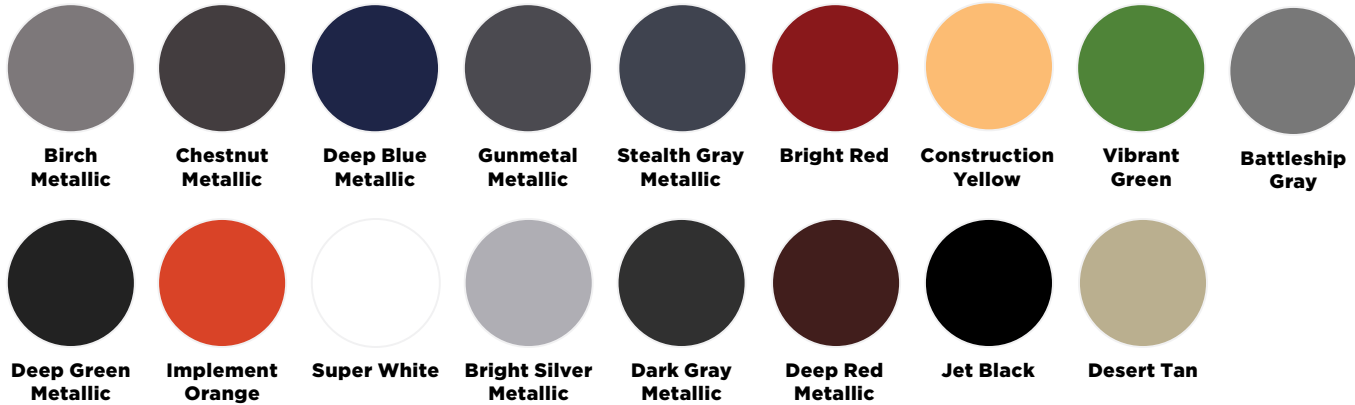

Titan proudly uses PPG Paint and Dexter Axles.



TILT DECK UTILITY AVAILABLE LENGTHS

Length	Axles	Est. Base Weight
16'	2 x 6000#	2880#
20'	2 x 7000#	3720#
4'+16'	2 x 7000#	3840#
4'+20'	2 x 7000#	3940#
6'+16'	2 x 7000#	3880#
6'+20'	2 x 7000#	4020#

TILT DECK UTILITY STANDARD FEATURES




Description	Bumper Hitch	Gooseneck
Double 6" Channel Structure (main frame boxed over 20')	•	•
Stationary Valve	•	•
Torsion EZ Lube Axles	•	•
3" Channel Crossmembers	•	•
7000# Torsion Axles w/ 8 Bolt Hubs on 20'+ Trailers	•	•
Electric Brakes on all 4 Wheels	•	•
Stake Pockets with Flat Iron Rub Rail	•	•
6K 8 Bolt Hubs on 16' Tilt only	•	•
2-5/16" Adjustable Coupler	•	•
Chain Box Standard on Full Tilts Only	•	
Channel Iron Front Rail	•	•
Spare Tire	•	•
Breakaway Battery Box with Charger and Tester	•	•
Spring Loaded Dual Pin Jack	•	•
11 ga. Diamond Plate Fenders	•	•
Sealed Beam Recessed L.E.D. Lights	•	•
Length Includes 2' of Dovetail Ramp	•	•
7-Prong Heavy Cord	•	
7-Prong Cold Weather Cord		•

TILT DECK UTILITY **OPTIONAL FEATURES**


Description	Bumper Hitch	Gooseneck
Rubber Composite Flooring (Includes 12" Cross members)	•	•
Blackwood Rubber Infused Lumber – Full Deck Width	•	•
Blackwood Rubber Infused Lumber 3 Outside Boards Each Side	•	•
Welded Heavy Duty D-Ring	•	•
Pintle Hitch	•	
Add Footage to Stationary Deck	•	•
102" Wide on Tilt Deck (Stationary Deck not Included)	•	•
102" Wide on Stationary Deck	•	•
Flat Dovetail	•	•
Drive-over Fenders on Tilt Deck Portion (Makes Trailer 102" Wide)	•	•
Removable Fender (Each)	•	•
Aluminum Tread Bright Fenders	•	•
86" Wide Between Fenders, 106" Wide Overall (May Require Over Width Permit, Check with Local Laws)	•	•
Extend Tongue with Chain Box (6' Long) on Trailers with Stationary Decks Only	•	
Extend Tongue with Poly Box (6' Long) on Trailers with Stationary Decks Only	•	
Add Lid to Chain Box on Full Tilt – Moves Jack Forward	•	
Fork Holders (2x6 Tube – 3' Apart)	•	•

Description	Bumper Hitch	Gooseneck
Axles (Non-Standard Axles may increase lead time)		
7000# Torsion EZ Lube 8 Bolt Hubs	•	•
Triple 7000# Axles – Tilting Portion of Deck Must be 20'	•	•
8000# Torsion EZ Lube Axles w/ 14 Ply Radial Tires (82" wide between fenders)	•	•
Surge Brake	•	

TILT DECK UTILITY
OPTIONAL FEATURES

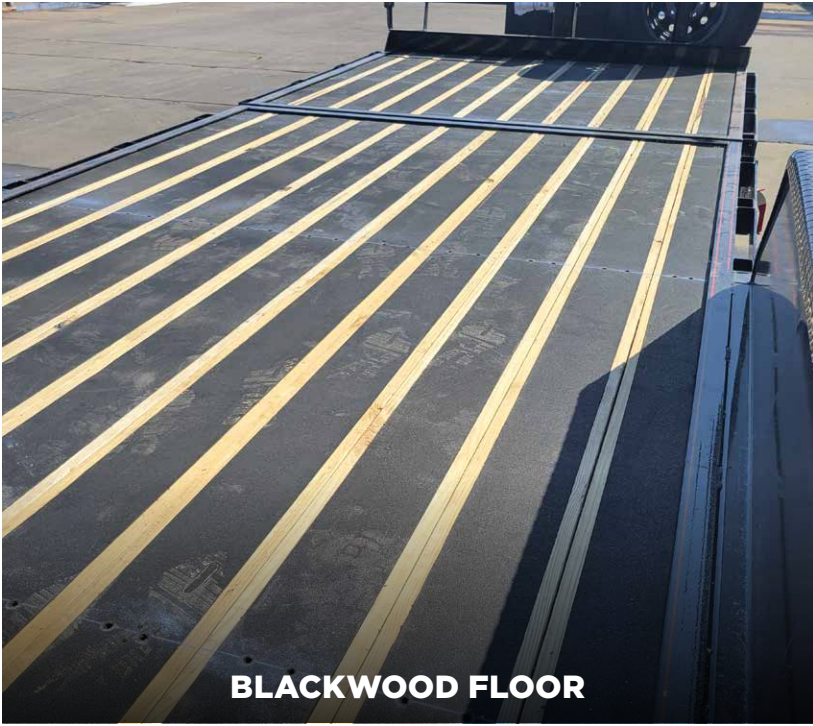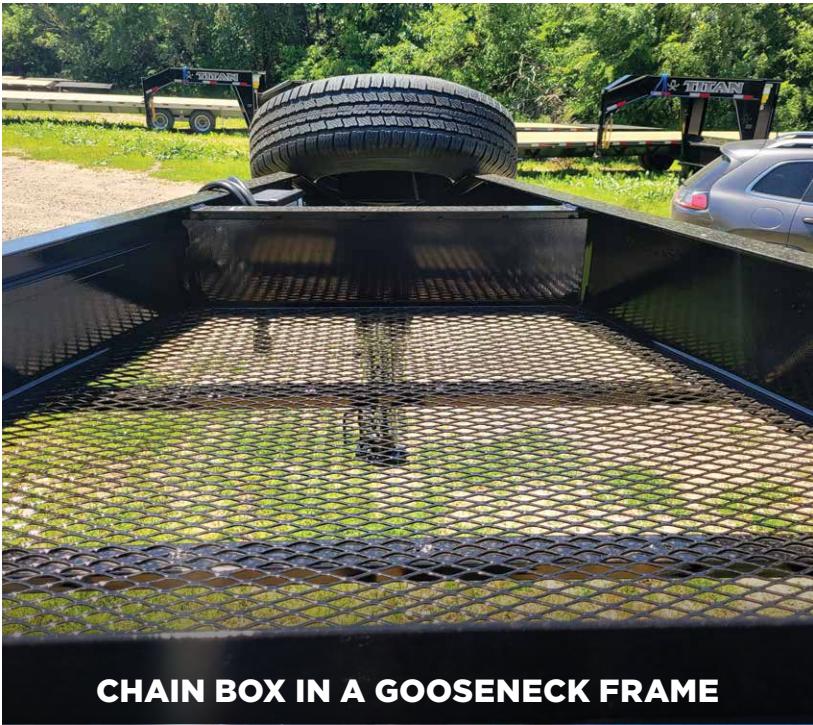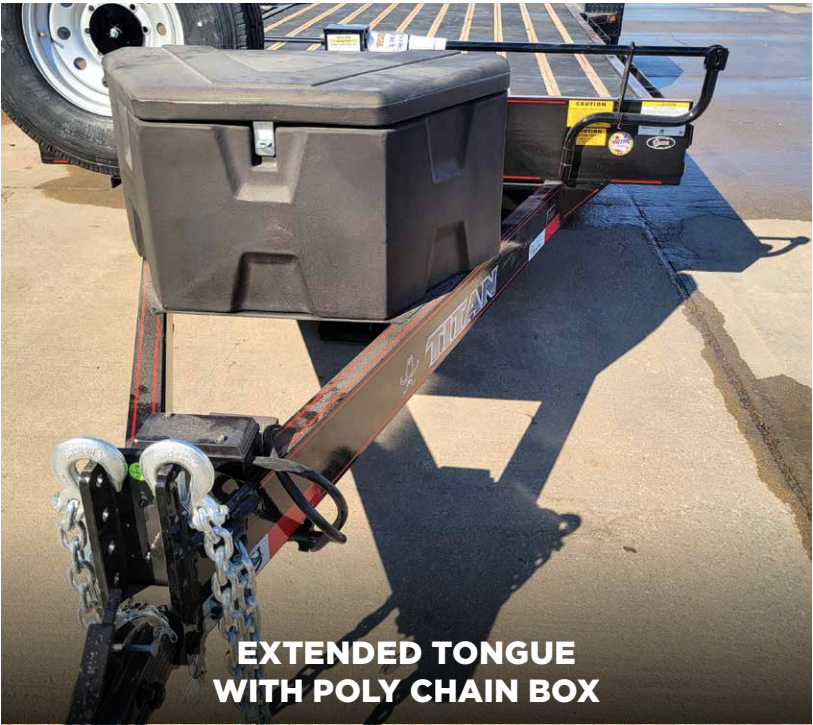

TILT DECK UTILITY OPTIONAL FEATURES

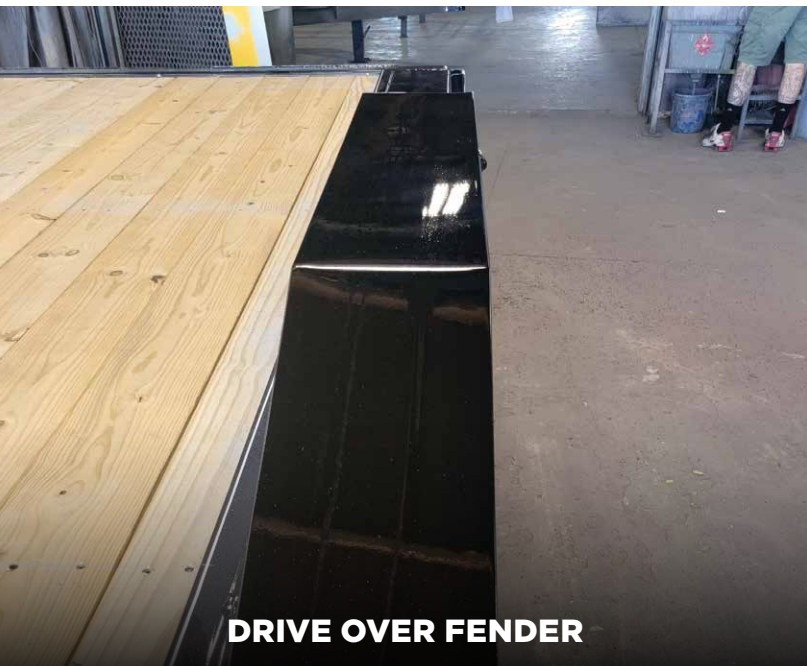

A HIGHER STANDARD OF **QUALITY**